




Flame Retardant fabric for FR-clothing

GEFEST-480

100% COTTON

480 GSM / FR-SATIN 5/2

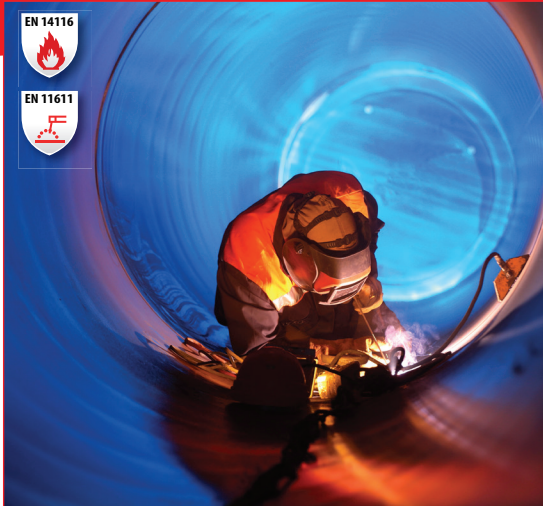

Fabric name	Gefest-480
Fabric weight	480 g/m ² ± 5%
Composition	100% Cotton
Usable width	152 cm
Weave	Satin 5/2
Finishes	Flame Retardant
Application	FR welders jackets, trousers and coveralls
Washing instruction	

FR & SPECIAL PROPERTIES

Flame retardant	EN ISO 11612 A1 & A2, B1, C1, E3, F1	EN ISO 11611 Class 2
-----------------	--------------------------------------	----------------------

PHYSICAL PROPERTIES

		warp	weft
Tensile strength, N	ISO 13934-1:1999	1900 N	1200 N
Tearing strength, N	ISO 13937-2:2000	80 N	110 N
Dimensional Stability To Washing, max	ISO 5077-ISO 15797	3%	
Abrasion Resistance	ISO 12947-2:1999	35,000 rubs	
Pilling Resistance	ISO 12945-2:2001	4	

COLOUR FASTNESS

			Light	Mid	Dark	Special colors
			Orange, Yellow, Red	Green, Grey, Royal Box	Dark Navy, Navy, Royal Blue	Black
Wash Fastness Method E2S (95°C)	ISO 105-C06	Colour Change	4-5	4-5	4-5	4
		Stain on Polyester	4-5	4-5	4	4
		Stain on Cotton	4	4	4	3-4
Rub Fastness	ISO 105-X12:1995	Wet	3	3	2-3	2
		Dry	4	4	4	4
Light Fastness	ISO 105-B02		3	4	4	4

XM Textiles Europe
 Email: info@xmtextiles.com
 www.xmtextiles.com

Darius ir Gireno st. 42A Office 509
 Vilnius LT – 02189 Lithuania
 Tel: +370 (347) 20299

Sos.Tamasi 20, Hala 3A, et. 1
 Buftea (platforma Rombiz), Romania
 Zip 070000, Tel: +40 31 630 36 39